


# Doorslagbeveiligde machinevoeten DNV gecertificeerd

Art.Code	L (mm)	Ls (mm)	K (mm)	D (mm)	H (mm)	B (mm)	M (mm)	d (mm)	Shore A
6010840S	172	144	82	108	38	108	M16i	13,5	40°
6010850S	172	144	82	108	38	108	M16i	13,5	50°
6010860S	172	144	82	108	38	108	M16i	13,5	60°
6010870S	172	144	82	108	38	108	M16i	13,5	70°

Indien gewenst is de machinevoet leverbaar met hoogteverstelling

- L = lengte
- Ls = hartafstand bevestigingsgaten
- K = diameter kap
- D = diameter
- H = hoogte
- B = breedte
- M = schroefdraad
- d = boring
- Shore A = hardheid

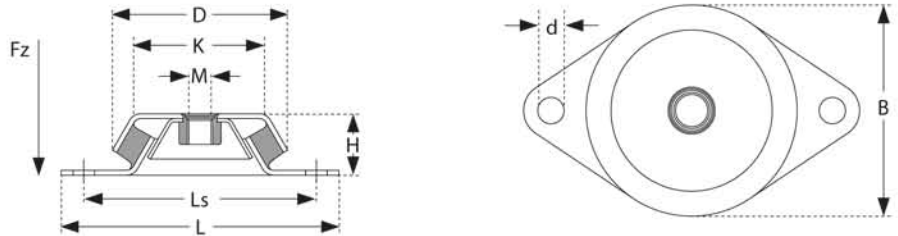

## Belasting Fz

