


Doorslagbeveiligde machinevoeten


type Triflex

Art.Code	L (mm)	Ls (mm)	K (mm)	H (mm)	B (mm)	BS (mm)	M (mm)	d1 (mm)	d2 (mm)	Sh A
PC100045	120	100	60	40	60	-	M12i	11	14	45°
PC100055	120	100	60	40	60	-	M12i	11	14	55°
PC100065	120	100	60	40	60	-	M12i	11	14	65°
PC100075	120	100	60	40	60	-	M12i	11	14	75°
4.M12x100VERZ	Nivelleerspindel M12 x 100 compleet									

- L = lengte
- Ls = hartafstand sleufgaten
- B = breedte
- H = hoogte
- M = schroefdraad
- K = lengte draagvlak kap
- d1 = sleufbreedte
- d2 = sleuflengte
- d3 = sleuflengte
- Sh A = rubberhardheid in Shore A

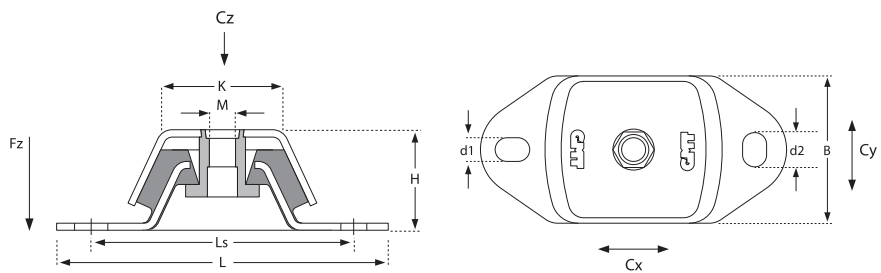

Belasting Fz

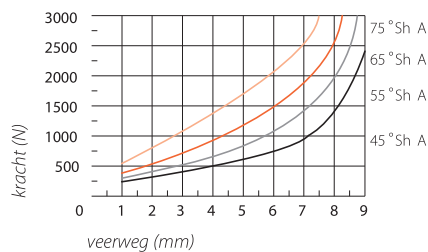

Verhouding horizontale stijfheden
Cx (langsrichting), Cy (dwarsrichting)
ten opzichte van verticale stijfheid
Cz (drukrichting)
Cz : Cx : Cy
1 : 2,5 : 0,75

